

**TURCK**

**Industrial  
Automation**

**CONTACTLESS  
ENCODERS**

**A WORLD FIRST**




***Sense it! Connect it! Bus it! Solve it!***

# New encoder eliminates the need for compromises

TURCK's new encoder means that the user no longer has to make a compromise between resolution and rugged design. All the measures required to protect encoders from mechanical stress using springs or double bearings are no longer necessary. Apart from the interference immunity and wear-free design of the system, the user also benefits from the parametrization and mounting concept that allows a single encoder model

to be used as a universal encoder for a countless number of applications. This single model can replace several 100 different encoder types.

The mounting concept also keeps this universal approach: Adapter rings make it possible for the user to fit the positioning element to shafts of different diameters. He only has to keep a single encoder in stock which he can use for all applications on shafts up to 20 mm in diameter.

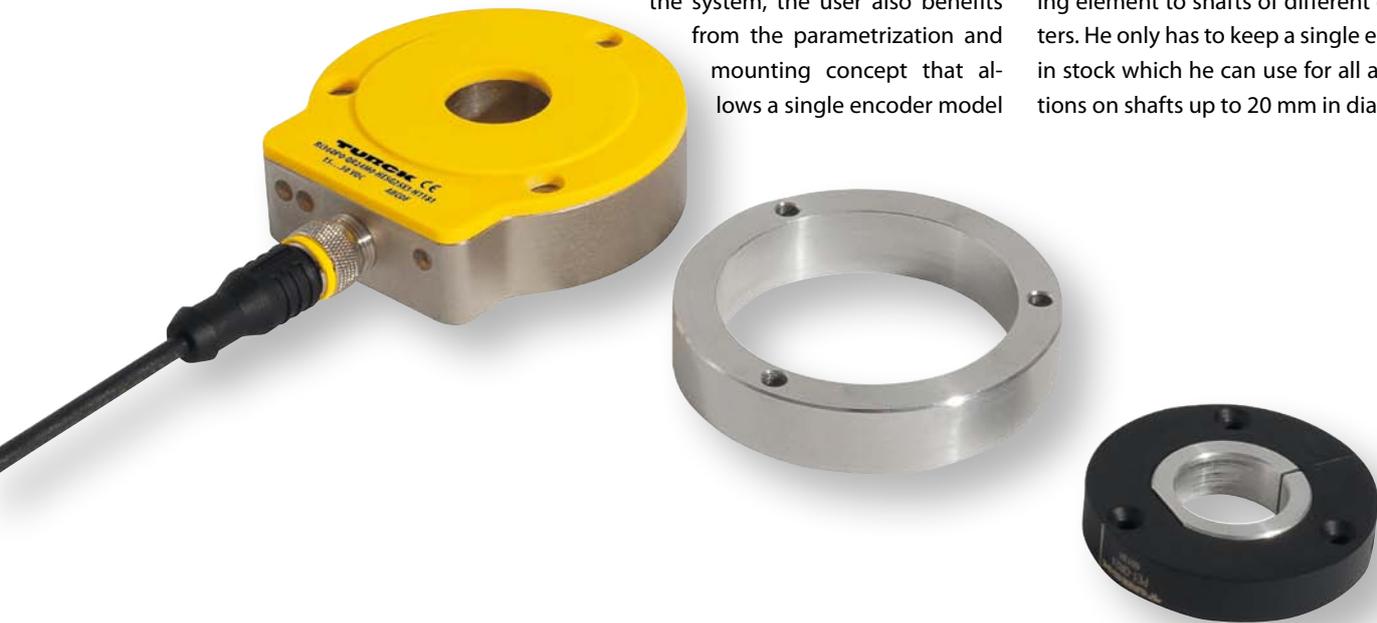


## Fully potted electronics

The resonant circuit measuring principle makes it possible to design a fully potted sensor housing without seals, that is separate from the positioning element.

This therefore fully excludes the possibility of dust or water penetrating into the electronics. The contactless measuring principle of the encoder enables it to compensate for vibration and offset up to 4 mm.

Magnetic fields cannot disturb the measuring process anyway since the positioning element is not based on a magnet but on an inductive coil system, through which the sensor and the positioning element (resonator) can form an oscillation circuit.

<b>— QR24 inductive encoders</b>	
Technology	4
Features	6
Customer Benefits	8
<b>— Connection variants – Types and data</b>	
Absolute single/multiturn encoder with SSI interface	10
Absolute single/multiturn encoder with Modbus RTU	12
Absolute singleturn encoder with programmable analog output (U/I)	14
Absolute singleturn encoder with programmable analog output (U), for mobile machines	16
Absolute single/multiturn encoder with programmable analog/digital output (U/I/PNP/NPN), IO-Link compatible	18
Incremental encoders - push-pull with A, B and Z-track	20
<b>— Accessories</b>	
Accessories for fieldbus connection	22
Connection and mounting accessories	24
Ready-to-install positioning elements/positioning elements and reducing bushes	24
Shields/Standard mounting accessories	26
Installation options	27

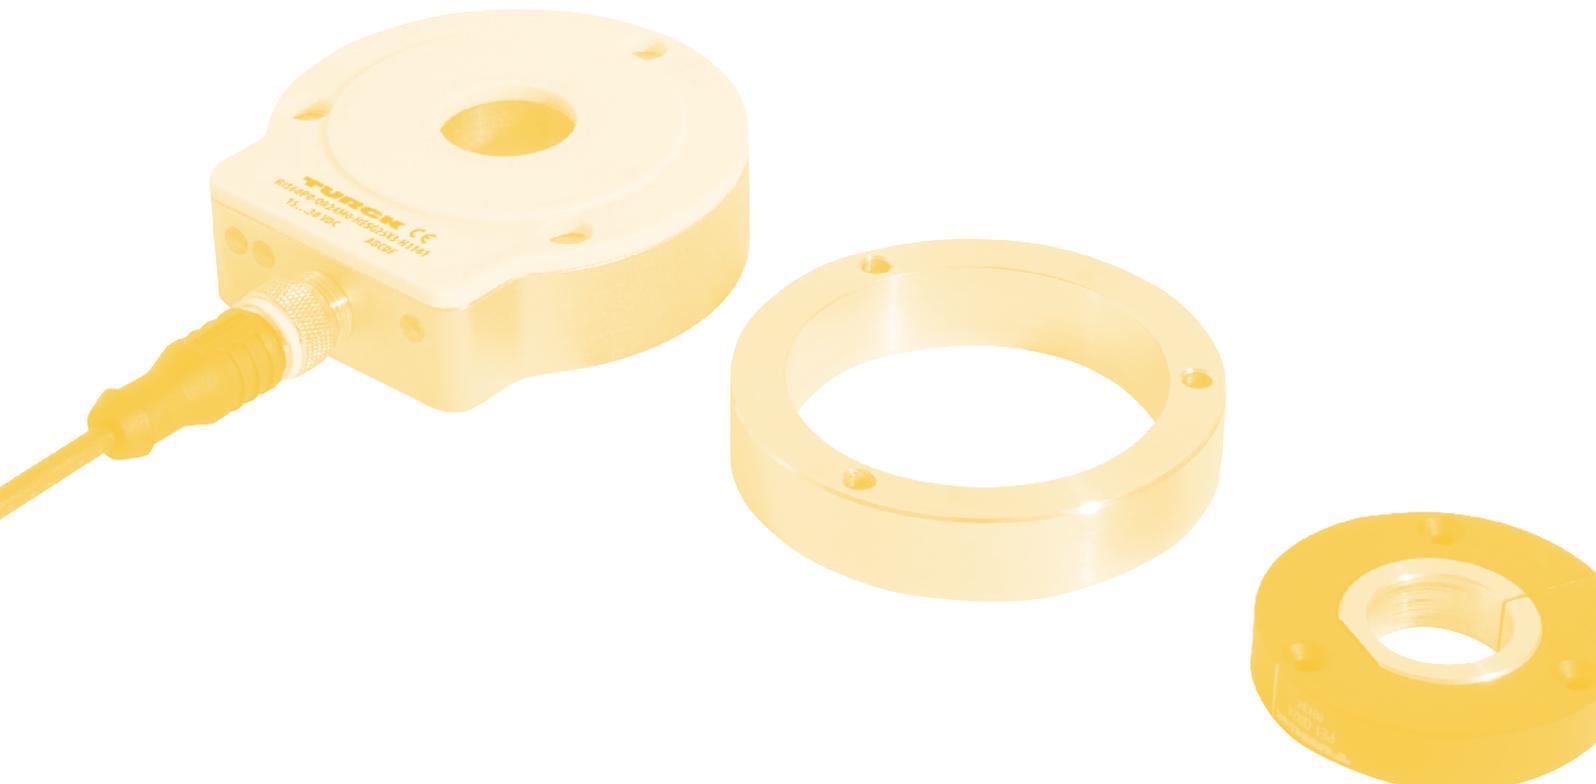

# The technology – precise, rugged and safe


## Measuring principle

The measuring principle of the new encoders is based on the revolutionary, inductive resonance coupling circuit, which offers considerable benefits compared to optical or magnetic measuring principles. The sensor houses emitter and receiver coil systems that are manufactured as printed circuit coils with ex-

ceptional precision. The emitter coils are excited with a high-frequency AC field and form with the positioning element, the so-called resonator, an inductive resonance coupling circuit. This causes the positioning element to be inductively coupled with the receiver coils.



The geometry of the receiver coils is designed so that different voltages are induced in the coils depending on the position of the positioning element, and thus determine the sensor signal supplied. The sensor is provided with a low-precision and a high-precision receiver coil system in order to increase its flexibility and measuring speed. The low-precision receiver coil system locates the positioning element firstly with less accuracy, whilst the high-precision system carries out the fine position measuring.

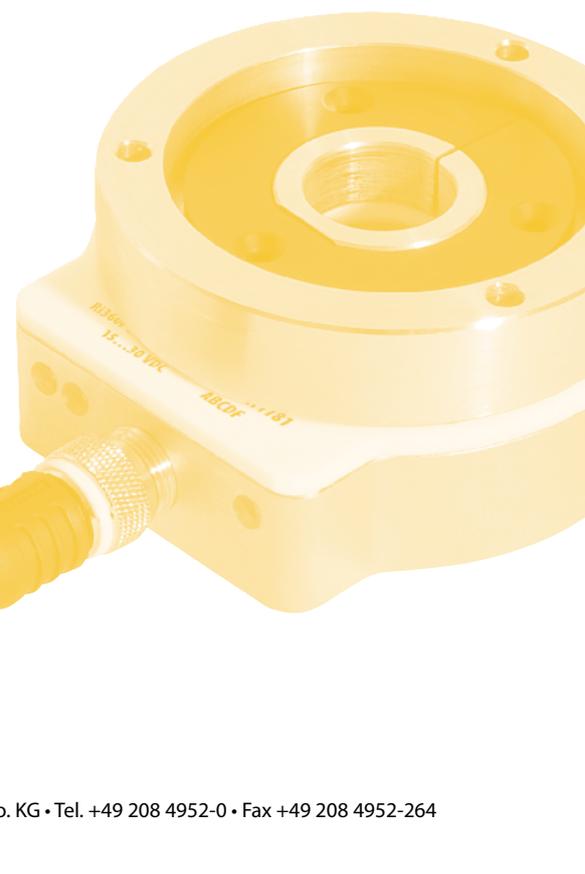

### Electronics and coil geometry

A special coil arrangement ensures that a stable resonance coupling is implemented in a defined distance range, and that the sensor signal does not change if there is any lateral movement or a change in distance.

The signals are evaluated in the internal 32-bit processor and are presented at the output with an exceptionally high resolution. The electronics are implemented on two board levels: The PCB on which the sensor element is positioned is located

directly under the active face; the electronic circuit for the signal evaluation on the other hand, is housed one level below it.




### Status LEDs

The encoder independently monitors its operational readiness and indicates this with a green LED. It warns the user of any impending signal loss between the sensor and positioning element via the yellow LED. Faults are indicated via the red LED. The operational status of the sensor is thus easily determined at any time.

### Housing and shaft adaption

The housing of the inductive encoder is made of metal, with plastic on the active face. The sensor can be mounted easily from both sides. The positioning element is adapted to the shaft in place by means of a shaft ring supplied. This is available in various diameters from 6 to 20 mm, and 1/8" and 3/8". The positioning ele-

ment can also be screwed frontally to the shaft and then covered with the supplied blanking plug.

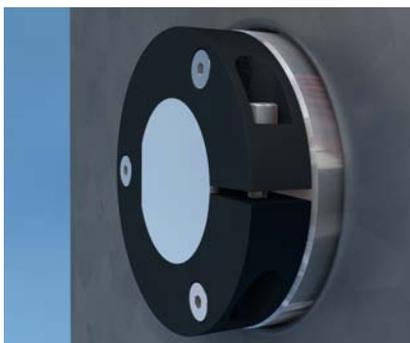

# Features

## Non-contact rotation measuring

The new measuring process is a completely contactless and wear-free system. Important characteristics such as accuracy, linearity and sealing are thus retained for the entire lifespan of the sensor and guarantee perfect sensor operation at any time.



## Rugged and fully sealed housing

The fully encapsulated die-cast metal housing ensures the high mechanical strength of the sensor. The sensor also stands out on account of its excellent resistance to many chemicals and oils. The metal housing is rugged and allows flexible mounting.


TURCK inductive encoders come in highly sealed housings and offer permanent protection to IP69K/IP67. The devices are also resistant to a number of aggressive ambient media.

Combined with the comprehensive range of mounting accessories, the sensor can always be mounted in the installation securely, flexibly and simply.

## Mechanically and electrically wear-free

The major disadvantage of previous encoders is the necessary direct mechanical connection of the rotating shaft that is inherent in their design. The seal of the encoder housing also becomes brittle, cracked and then leaks due to the stress permanently induced by the fast rotating shafts. Penetrating water, dust or sand damage the sensitive sensor circuit and cause downtimes.

The QR24 inductive encoder works without any mechanical coupling into the fully encapsulated sensor housing. This contactless encoder is therefore not only electrically but also mechanically wear-free.


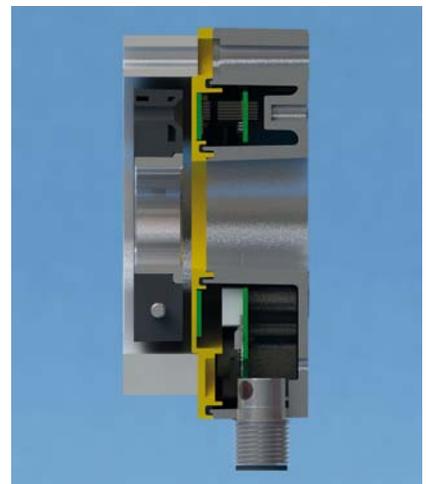


**Flexible process connection**

Various output types, such as an analog current or voltage output, Modbus RTU or SSI output, make it possible to carry out the required adaption to the higher-level PLC.

The signal can thus for example be connected simply via the TURCK remote I/O systems to different bus systems. The connection is always implemented with

M12 x 1 standard male connectors so that any special connectors are unnecessary. An IO-Link version is also available which enables extensive parametrization.

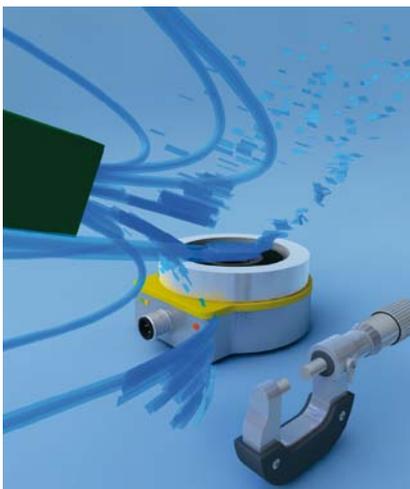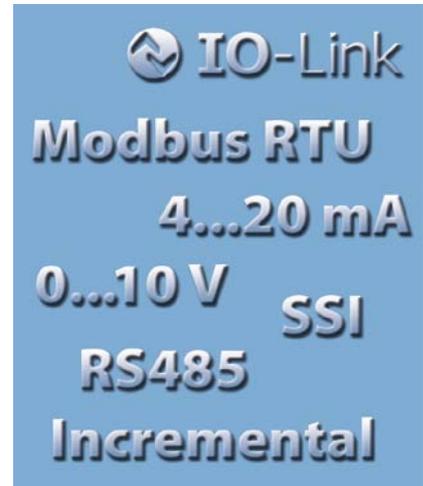

**Maximum precision and immunity**

The measuring principle and the system resolution of the new inductive encoders ensure highly precise measuring signals and thus enable a very high linearity and reproducibility. Interference pulses that could affect the output signal, such as from: frequency inverters, large motors, ferrite metals or permanent magnets are not a problem. The encoder operates with a resonator oscillation circuit and is therefore immune to any kind of magnetic field whilst offering an outstanding

EMC performance. Mechanical interference is also not a problem as this system operates without a shaft fitted in the sensor unit. Environmental factors such as water, dust or vibration on the shaft that could considerably wear the mechanical components or destroy the electrical circuitry are thus irrelevant.

**Flexible accessories, teachability**

Every application is different. The mechanical components involved, such as the shaft diameter, may be different. The electrical system may require a single-turn or a multiturn signal.

can also adapt electrically in no time to the requirements of the application at hand.

Thanks to its ingenious mechanical concept, the TURCK inductive encoder can be adapted perfectly to any standard shaft by means of different adapter sleeves. The QR 24 encoder series consists of teachable sensors that customers




# Customer benefits

## Process safety

The encoder offers reliable operation at any time even in the harshest ambient conditions. The sensor comes with protection to IP69K/IP67 and constantly supplies precise results, even if it is exposed to dust or water. Vibrations and any horizontal or vertical movement of the positioning element do not affect the

output signal. The encoder is not affected by magnetic fields (such as caused by electric motors) since the resonant circuit measuring principle provides the sensor with an outstanding EMC performance. Logically implemented state-of-the-art technology has thus been used to ensure fewer downtimes during production.

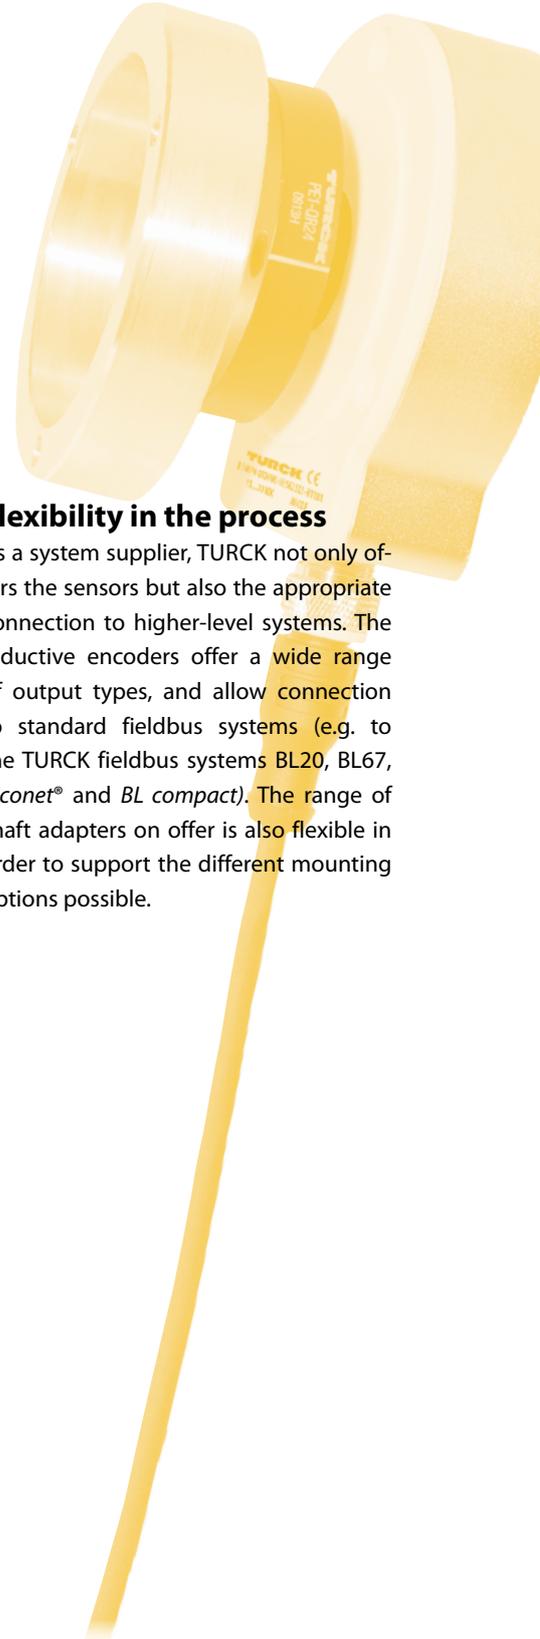

## Flexibility in the process

As a system supplier, TURCK not only offers the sensors but also the appropriate connection to higher-level systems. The inductive encoders offer a wide range of output types, and allow connection to standard fieldbus systems (e.g. to the TURCK fieldbus systems BL20, BL67, *piconet*<sup>®</sup> and *BL compact*). The range of shaft adapters on offer is also flexible in order to support the different mounting options possible.

## Standardization

The simple and flexible parametrization enables the sensor to be adapted to the particular requirements of the user, for example, with regard to the SSI bit length and the measuring range for an analog voltage output.

The available shaft adapters make it possible to use the existing shaft in place and for all standard diameters.

The standardization thus makes it possible to achieve a high level of stock availability. TURCK can respond to new requirements within a few days, thus enabling the customer to keep his stock to a minimum. TURCK offers this delivery service worldwide through a large number of subsidiaries and agents. Customers worldwide can therefore benefit from TURCK's manufacturing expertise.



## Maintenance free

Unlike conventional optical encoders that fail with time due to the inherent permanent stress on the shaft bearings, the new inductive encoder also operates mechanically contact-free, i.e. wear-free and maintenance-free. LEDs indicate any faults and are clearly visible even from a distance. Status queries can also be implemented in this way. The measuring range can be adjusted easily for new tasks without any major effort required.

# Ri-QR24 inductive encoder

Absolute single/multiturn encoder with SSI interface

## Product features

- Compact and rugged housing
- SSI output
- 25-bit, Gray coded
- SSI cycle rate: 62.5 KHz...1 MHz
- Default setting: Singleturn  
Bit 0...15, multiturn Bit 16...21,  
Status bit 22...24
- Single or multiturn mode, data frame  
length as well as bit coding settable  
via PACTware™ with programming box  
USB-2-IOL-0002 and adapter cable
- Male connector, M12 x 1, 8-pin


## LED indication

- **green:** Sensor power supply OK
- **yellow:** Positioning element in  
measuring range with reduced signal  
quality (e.g. distance too large), see  
status Bit 23
- **yellow flashing:** Positioning element  
not in sensing range, see status Bit 24
- **off:** Positioning element in measuring  
range

## Multiturn errors

- **red:** Position changed during a power  
loss, see status Bit 22


**Ri 360 P1 - QR24 M1 - H E S G 25 X3 - H1 1 8 1**

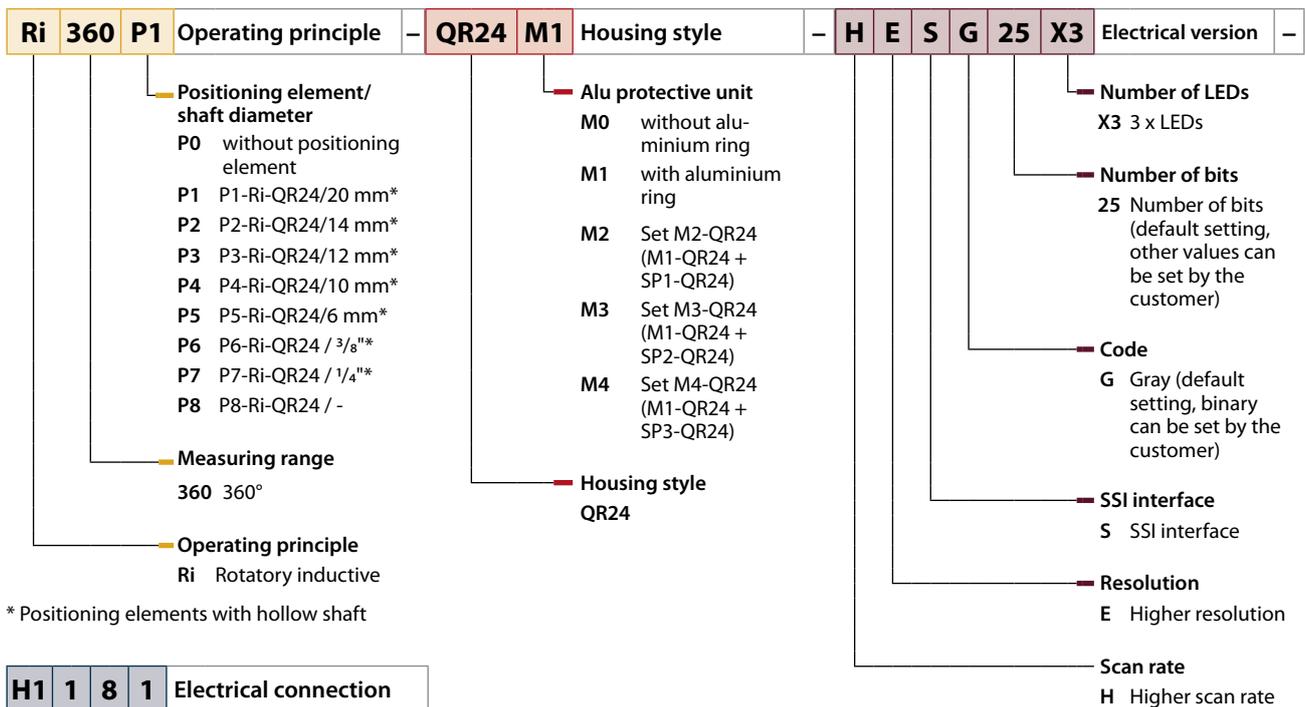

\* Positioning elements with hollow shaft

**H1 1 8 1** Electrical connection

- Assignment (digit 5)  
**1** Standard assignment
- Number of contacts  
(digit 4)  
**8** 8-pin M12 x 1
- Connector type (digit 3)  
**1** straight
- Connector type  
(digit 1 and 2)  
**H1** Male connector  
M12 x 1

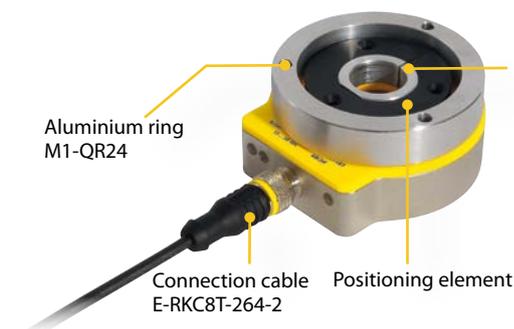


Reducing bush


### Ordering Information

The Ri360-QR24 sensors are available with different positioning elements for shaft diameters from 20 mm to 6 mm.

The sensors, the aluminium ring, the shields and the positioning elements are sold individually or in a set.

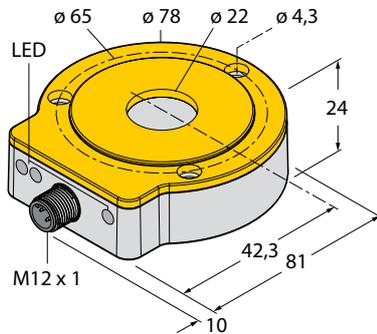

## Wiring diagram

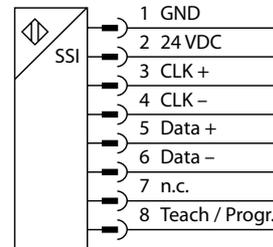

## Measuring range

Measuring range	0...360° Single or multiturn mode
-----------------	--------------------------------------

## System

Resolution single mode	16 bit (default)
Resolution multiturn mode	6 bit (default)
Repetition accuracy	0.01 %
Linearity tolerance	≤ 0.05 % full scale
Temperature drift	≤ ± 0.003 %/K
Ambient temperature	-25...+85 °C
Nominal distance	1,5 mm

## Electrical data

Operating voltage	15...30 VDC
Ripple	≤ 10 % U <sub>pp</sub>
Rated insulation voltage	≤ 0.5 kV
Reverse polarity protection	yes (power supply)
Output function	eight-wire, SSI, 25-bit, Gray coded
Process data range	can be set
Diagnostic bits	Bit 22: Position changed during a power loss Bit 23: Positioning element is in the measuring range, reduced signal quality (e.g. distance too large) Bit 24: Positioning element is outside of measuring range
Scan rate	Data telegram as multiturn and singleturn process data or error bits can be set 5000 Hz/the scan rate of the sensor depends on the SSI cycle time of the master. It is 1 to 5 KHz (signal run time 200 μs) in synchronized operation
Current consumption	< 100 mA

## Housing

Dimensions	81 x 78 x 24 mm
Housing material	Metal/plastic, ZnAlCu1/PBT-GF30-V0
Connection	Male connector, M12 x 1
Vibration resistance	EN 60068-2-6, 55 Hz
Shock resistance	EN 60068-2-27, 30 g
Continuous shock resistance	EN 60068-2-29, 100 g
Degree of protection	IP67/IP69K
MTTF	138 years to SN 29500 (Ed. 99) 40 °C

## LEDs

Operating voltage indication	LED green
Measuring range indication	LED, yellow, yellow flashing
Fault indication	LED red

## Miscellaneous

Included in scope of supply	Mounting aid MT-QR24
-----------------------------	----------------------

## Ordering example

<b>Ri</b>	<b>360</b>	<b>P1</b>	-	<b>QR24</b>	<b>M1</b>	-	<b>H</b>	<b>E</b>	<b>SG25</b>	<b>X3</b>	-	<b>H1181</b>
Rotary inductive encoder	Measuring range 360°	Positioning element P1-Ri-QR24		Housing style QR24	alu ring M1-QR24		Higher scan rate	Higher resolution	SSI output, Gray coded 25-bit	3 LEDs		Connection via male connector, M12 x 1, 8-pin

# Ri-QR24 inductive encoder

Absolute single/multiturn encoder with Modbus RTU

## Product features

- Compact and rugged housing
- Versatile mounting possibilities
- 16-bit singleturn, 16-bit multiturn
- Zero point and direction adjustable via Easy Teach
- Immune to electromagnetic interference
- 15...30 VDC
- Male connector, M12 x 1, 5-pin
- Modbus RTU, RS485


## LED indication

- **green:** Sensor power supply OK
- **yellow:** Positioning element is in the measuring range, reduced signal quality (e.g. distance too large)
- **yellow flashing:** Positioning element is outside of sensing range
- **off:** Positioning element in measuring range

## Multiturn faults

- **red:** Position changed during a power loss


**Ri 360 P1 - QR24 M1 - MRTU X3 - H1 1 5 1**

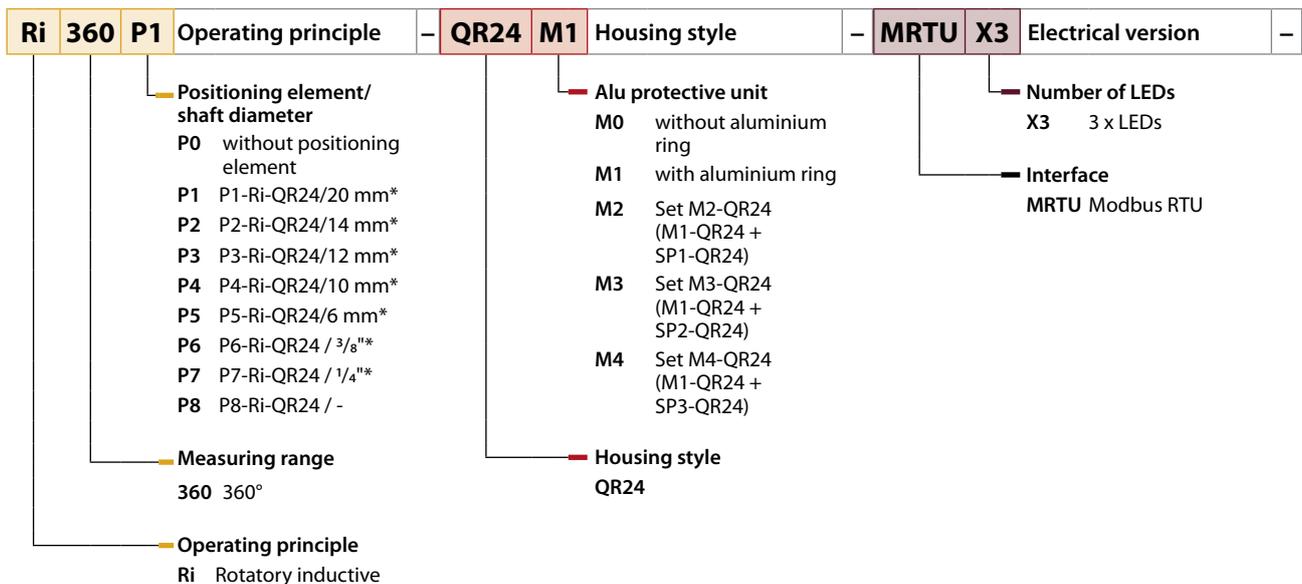

\* Positioning element with hollow shaft

**H1 1 5 1** Electrical connection

- Assignment (digit 5)
- 1 Standard assignment
- Number of contacts (digit 4)
- 5 5-pin M12 x 1
- Connector type (digit 3)
- 1 straight
- Connector type (digit 1 and 2)
- H1 Male connector M12 x 1

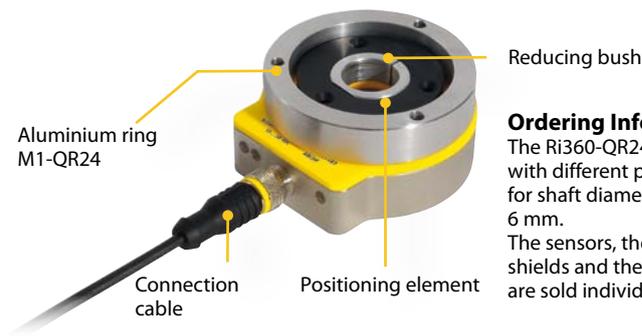


## Ordering Information

The Ri360-QR24 sensors are available with different positioning elements for shaft diameters from 20 mm to 6 mm. The sensors, the aluminium ring, the shields and the positioning elements are sold individually or in a set.


# Ri360P0-QR24M0-MRTUX3-H1151

**TURCK**

Industrial  
Automation

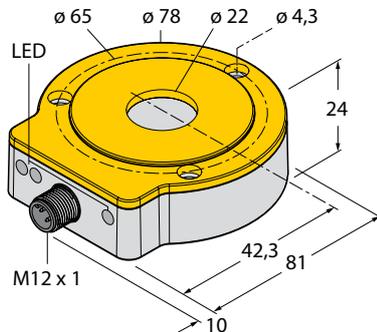

## Wiring diagram

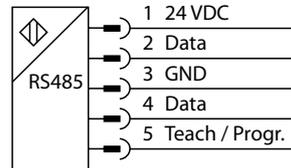

## Measuring range

Measuring range	0...360° Single or multiturn mode
-----------------	--------------------------------------

## System

Resolution	16-bit/16-bit
Repetition accuracy	0.01 %
Linearity tolerance	≤ 0.05 % full scale
Temperature drift	≤ ± 0.003 %/K
Ambient temperature	-25...+85 °C
Nominal distance	1.5 mm

## Electrical data

Operating voltage	15...30 VDC
Ripple	≤ 10 % U <sub>pp</sub>
Rated insulation voltage	≤ 0.5 kV
Reverse polarity protection	yes (power supply)
Output function	Five-wire, RS485, Modbus RTU
Scan rate	5000 Hz
Current consumption	< 100 mA

## Housing

Dimensions	81 x 78 x 24 mm
Housing material	Metal/plastic, ZnAlCu1/PBT-GF30-V0
Connection	Male connector, M12 x 1
Vibration resistance	EN 60068-2-6, 55 Hz
Shock resistance	EN 60068-2-27, 30 g
Continuous shock resistance	EN 60068-2-29, 100 g
Degree of protection	IP67/IP69K
MTTF	138 years to SN 29500 (Ed. 99) 40 °C

## LEDs

Operating voltage indication	LED green
Measuring range indication	LED, yellow, yellow flashing
Fault indication	LED red

## Others

Included in scope of supply	Mounting aid MT-QR24
-----------------------------	----------------------

expected availability Q1/2014

## Ordering example

<b>Ri</b>	<b>360</b>	<b>P1</b>	<b>-</b>	<b>QR24</b>	<b>M1</b>	<b>-</b>	<b>MRTU</b>	<b>X3</b>	<b>-</b>	<b>H1151</b>
Rotary inductive encoder	Measuring range 360°	Positioning element P1-Ri-QR24		Housing style QR24	alu ring M1-QR24		Modbus RTU interface	3 LEDs		Connection via male connector, M12 x 1, 5-pin

# Ri-QR24 inductive encoder

Absolute singleturn encoder with programmable analog output (U/I)


## Product features

- Compact and rugged housing
- Versatile mounting possibilities
- Immune to electromagnetic interference
- Programmable measuring range
- 16-bit resolution
- 15...30 VDC
- analog output 0...10 V and 4...20 mA
- Male connector, M12 x 1, 5-pin
- Analog output, configurable:  
e.g. 0...20 mA

## LED indication

- **green:** Sensor power supply OK
- **yellow:** Positioning element is in the measuring range, reduced signal quality (e.g. distance too large)
- **yellow flashing:** Positioning element is outside of sensing range
- **off:** Positioning element in measuring range


**Ri 360 P1 - QR24 M1 - ELiU5 X2 - H1 1 5 1**

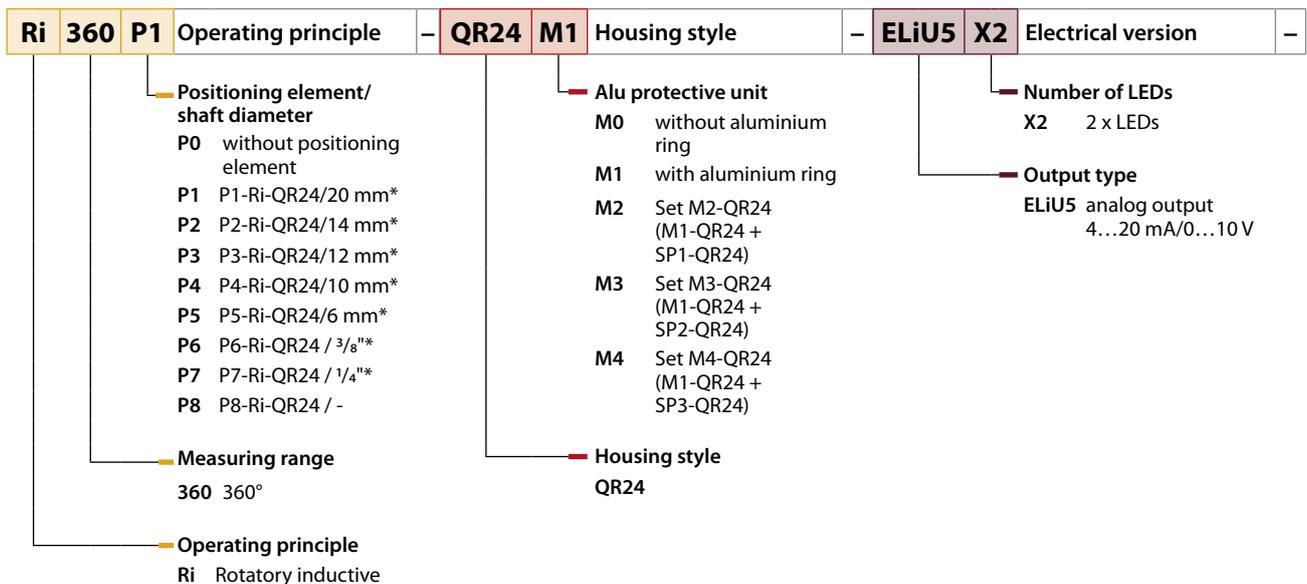

\*Positioning element with hollow shaft

**H1 1 5 1 Electrical connection**

- Assignment (digit 5)  
1 Standard assignment
- Number of contacts (digit 4)  
5 5-pin M12 x 1
- Connector type (digit 3)  
1 straight
- Connector type (digit 1 and 2)  
H1 Male connector M12 x 1

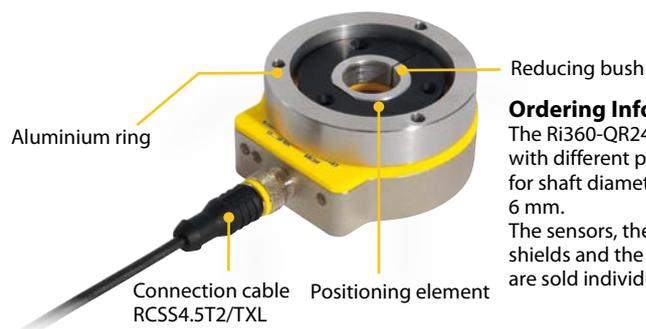

## Ordering Information


The Ri360-QR24 sensors are available with different positioning elements for shaft diameters from 20 mm to 6 mm.

The sensors, the aluminium ring, the shields and the positioning elements are sold individually or in a set.


# Ri360P0-QR24M0-ELiU5X2-H1151

**TURCK**

Industrial  
Automation

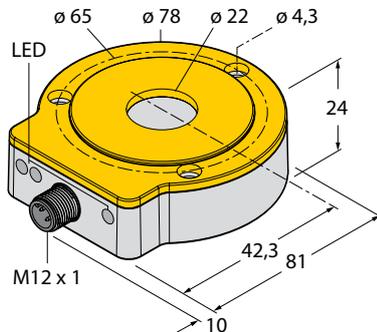

**Wiring diagram**

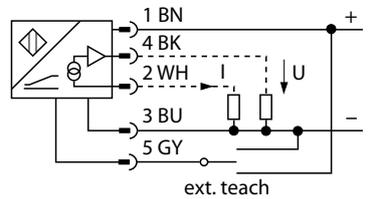

## Measuring range

Measuring range 0...360°

## System

Resolution 16-bit  
 Repetition accuracy 0.01 %  
 Linearity tolerance ≤ 0.05 % full scale  
 Temperature drift ≤ ± 0.004 %/K  
 Ambient temperature -25...+85 °C  
 Nominal distance 1,5 mm

## Electrical data

Operating voltage 15...30 VDC  
 Ripple ≤ 10 % U<sub>pp</sub>  
 Rated insulation voltage ≤ 0.5 kV  
 Reverse polarity protection Yes  
 Output function Five-wire, analog output  
 Voltage output 0...10 V  
 Current output 4...20 mA  
 Load resistance voltage output ≥ 4.7 kΩ  
 Load resistance current output ≤ 0.4 kΩ  
 Scan rate 5000 Hz  
 Current consumption < 100 mA

## Housing

Dimensions 81 x 78 x 24 mm  
 Housing material Metal/plastic, ZnAlCu1/PBT-GF30-V0  
 Connection Male connector, M12 x 1  
 Vibration resistance EN 60068-2-6, 55 Hz  
 Shock resistance EN 60068-2-27, 30 g  
 Continuous shock resistance EN 60068-2-29, 100 g  
 Degree of protection IP67/IP69K  
 MTTF 138 years to SN 29500 (Ed. 99) 40 °C

## LEDs

Operating voltage indication LED green  
 Measuring range indication LED, yellow, yellow flashing

## Others

Included in scope of supply Mounting aid MT-QR24

expected availability Q4/2013

## Ordering example

Ri	360	P1	-	QR24	M1	-	ELiU5	X2	-	H1151
Rotary inductive encoder	Measuring range 360°	Positioning element P1-Ri-QR24		Housing style QR24	alu ring M1-QR24		Analog output 4...20 mA 0...10 V	2 LEDs		Connection via male connector, M12 x 1, 5-pin

# Ri-QR24 inductive encoder

Absolute singleturn encoder with programmable analog output (U), for mobile machines


## Product features

- Compact and rugged housing
- Versatile mounting possibilities
- Immune to electromagnetic interference
- Programmable measuring range
- 16-bit resolution
- 8...30 VDC
- analog output 0.5...4.5 V
- Male connector, M12 x 1
- Temperature range -40 ... 85 °C



## LED indication

- **green:** Sensor power supply OK
- **yellow:** Positioning element is in the measuring range, reduced signal quality (e.g. distance too large)
- **yellow flashing:** Positioning element is outside of sensing range
- **off:** Positioning element in measuring range

**Ri 360 P1 - QR24 M1 - ELU4 X2 - H1 1 5 1 / S97**

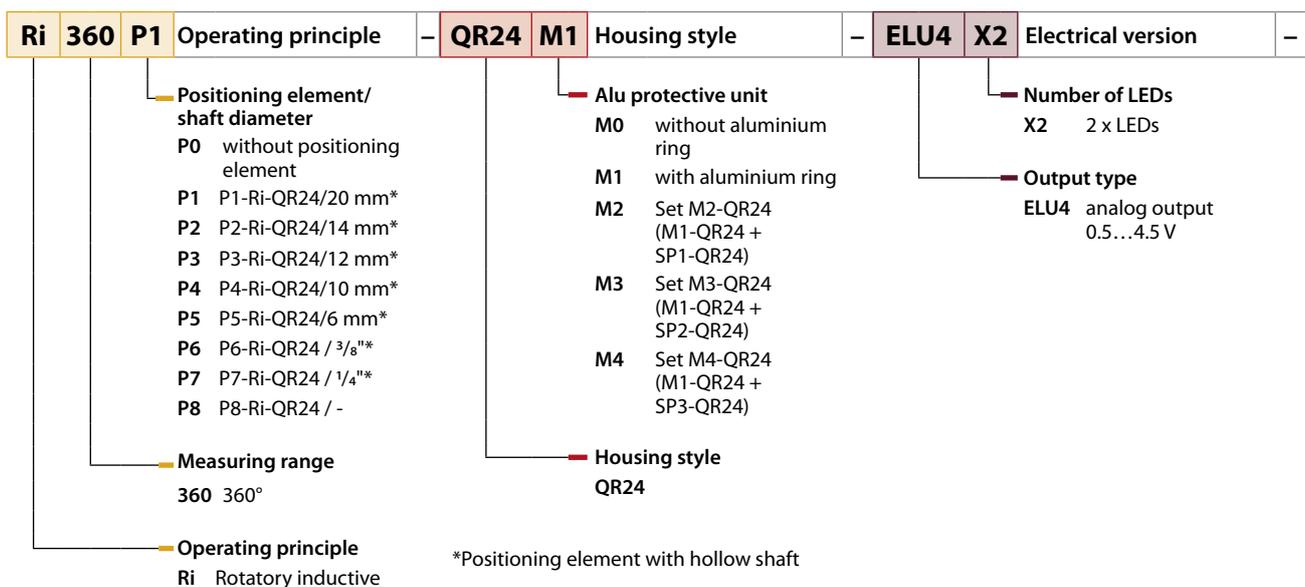

**H1 1 5 1 Electrical connection / S97 Ambient temperature**

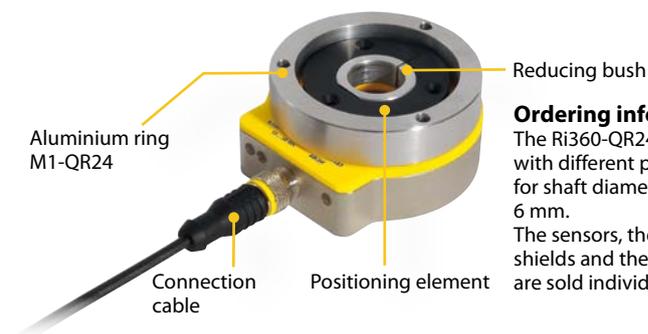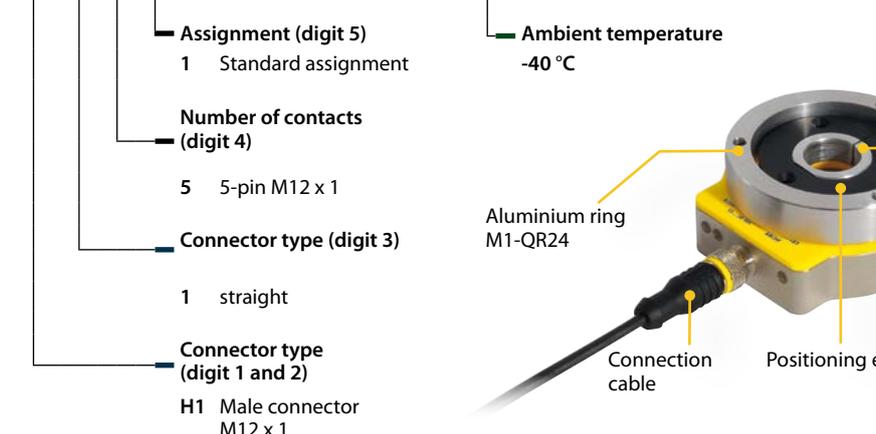


## Ordering information

The Ri360-QR24 sensors are available with different positioning elements for shaft diameters from 20 mm to 6 mm. The sensors, the aluminium ring, the shields and the positioning elements are sold individually or in a set.


# Ri360P0-QR24M0-ELU4X2-H1151

**TURCK**

Industrial  
Automation

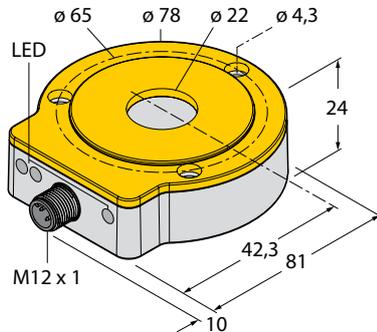

## Wiring diagram

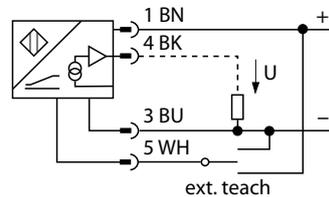

## Measuring range

Measuring range	0...360°
-----------------	----------

## System

Resolution	16-bit
Repetition accuracy	0.01 %
Linearity tolerance	≤ 0.05 % full scale
Temperature drift	≤ ± 0.004 %/K
Ambient temperature	-40 °C...+85 °C
Nominal distance	1.5 mm

## Electrical data

Operating voltage	8...30 VDC
Ripple	≤ 10 % $U_{pp}$
Rated insulation voltage	≤ 0.5 kV
Output function	Four-wire, analog output
Voltage output	0.5...4.5 V
Load resistance voltage output	≥ 4.7 kΩ
Scan rate	5000 Hz
Current consumption	< 100 mA

## Housing

Dimensions	81 x 78 x 24 mm
Housing material	Metal/plastic, ZnAlCu1/PBT-GF30-V0
Connection	Male connector, M12 x 1
Vibration resistance	EN 60068-2-6, 55 Hz
Shock resistance	EN 60068-2-27, 30 g
Continuous shock resistance	EN 60068-2-29, 100 g
Protection class	IP67/IP69K
MTTF	138 years to SN 29500 (Ed. 99) 40 °C

## LEDs

Operating voltage indication	LED green
Measuring range indication	LED, yellow, yellow flashing

## Others

Included in scope of supply	Mounting aid MT-QR24
-----------------------------	----------------------

expected availability Q1/2014

## Ordering example

Ri	360	P1	-	QR24	M1	-	ELU4	X2	-	H1151
Rotary inductive encoder	Measuring range 360°	Positioning element P1-Ri-QR24		Housing style QR24	alu ring M1-QR24		Analog output 0.5...4.5 V	2 LEDs		Connection via male connector, M12 x 1, 5-pin

# Ri-QR24 inductive encoder

Absolute single/multiturn Encoder with programmable analog/digital output (U/I/PNP/NPN), IO-Link compatible

## Product features

- Compact and rugged housing
- Versatile mounting possibilities
- Programmable measuring range, multiturn/single-turn mode
- All functions can be set via IO-Link/ PACTware™
- Analog output, configurable NC/NO switch functions as NPN or PNP version
- Process value in 16-bit IO-Link telegram
- Male connector, M12 x 1, 5-pin


## Measuring range indication via LED

- **green:** Sensor power supply OK
- **yellow:** Positioning element is in the measuring range, reduced signal quality (e.g. distance too large)
- **yellow flashing:** Positioning element is outside of sensing range
- **off:** Positioning element in measuring range



## Multiturn faults

- **red:** Position changed during a power loss

**Ri 360 P1 - QR24 M1 - ELiUPN8 X4 - H1 1 5 1**

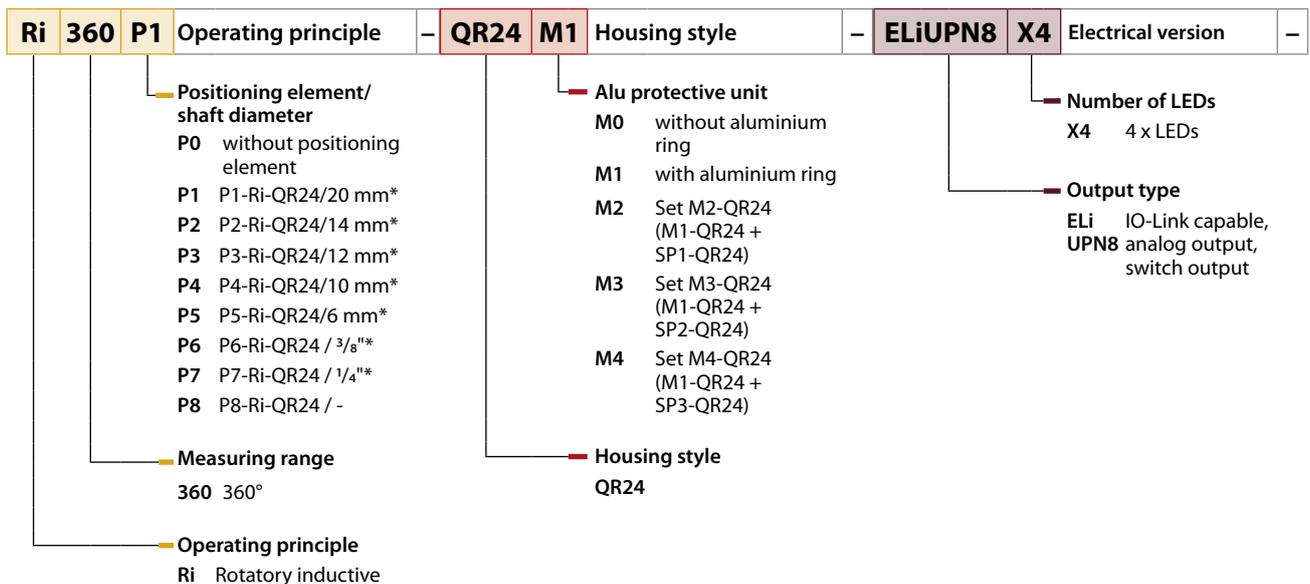

\* Positioning element with hollow shaft

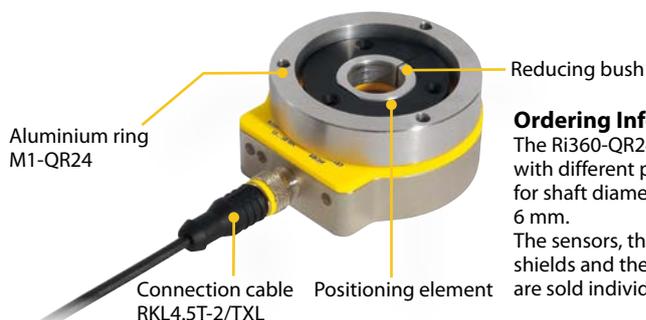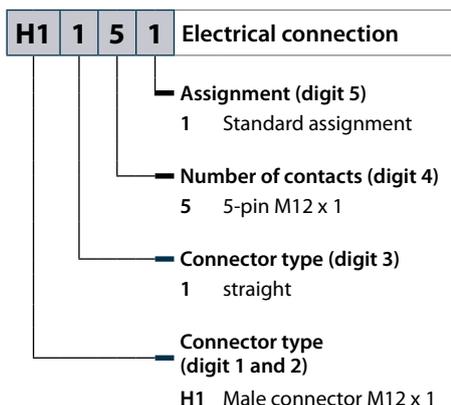


## Ordering Information

The Ri360-QR24 sensors are available with different positioning elements for shaft diameters from 20 mm to 6 mm. The sensors, the aluminium ring, the shields and the positioning elements are sold individually or in a set.


# Ri360P0-QR24M0-ELiUPN8X4-H1151

**TURCK**

Industrial  
Automation

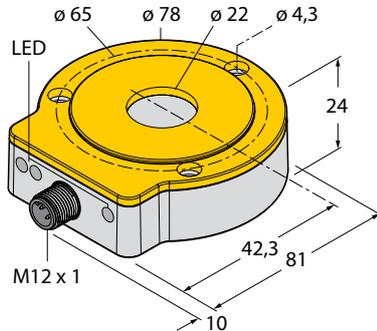

## Wiring diagram

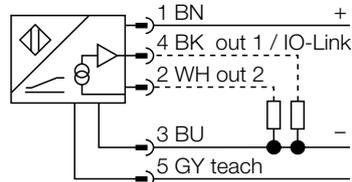

## Measuring range

Measuring range	0...360° Single or multiturn mode
-----------------	--------------------------------------

## System

Resolution	16-bit
Repetition accuracy	0.01 %
Linearity tolerance	≤ 0.05 % full scale
Temperature drift	≤ ± 0.004 %/K
Ambient temperature	-25...+85 °C
Nominal distance	1.5 mm

## Electrical data

Operating voltage	15...30 VDC
Ripple	≤ 10 % U <sub>pp</sub>
Rated insulation voltage	≤ 0.5 kV
Reverse polarity protection	yes, full
Output function	Five-wire, NO/NC, PNP/NPN, analog output
Voltage output	0...10 V
Current output	4...20 mA
Load resistance voltage output	≥ 4.7 kΩ
Load resistance current output	≤ 0.4 kΩ
Short-circuit protection	Yes/cyclic
Scan rate	5000 Hz
Current consumption	< 100 mA
Communication	IO-Link spezifiziert nach Version 1.0
Parametrization	FDT/DTM
Transmission rate	COM 2/38,4 kBit/s
Frame type	2.2

## Housing

Dimensions	81 x 78 x 24 mm
Housing material	Metal/plastic, ZnAlCu1/PBT-GF30-V0
Connection	Male connector, M12 x 1
Vibration resistance	EN 60068-2-6, 55 Hz
Shock resistance	EN 60068-2-27, 30 g
Continuous shock-resistance	EN 60068-2-29, 100 g
Degree of protection	IP67/IP69K
MTTF	138 years to SN 29500 (Ed. 99) 40 °C

## LEDs

Operating voltage indication	LED green
Switching state indication	LED yellow
Measuring range indication	LED yellow, yellow flashing
Fault indication	LED red

## Others

Included in scope of supply	Mounting aid MT-QR24
-----------------------------	----------------------

expected availability Q1/2014

## Ordering example

<b>Ri</b>	<b>360</b>	<b>P1</b>	-	<b>QR24</b>	<b>M1</b>	-	<b>ELiUPN8</b>	<b>X4</b>	-	<b>H1151</b>
Rotary inductive encoder	Measuring range 360°	Positioning element P1-Ri-QR24		Housing style QR24	alu ring M1-QR24		Output type IO-Link compatible analog output switching output	4 LEDs		Connection via male connector, M12 x 1, 5-pin

# Incremental encoder

## Push-pull with A-, B-, and Z-track

### Product features

- Measuring range indicated via LED
- Immune to electromagnetic interferences
- 1024 pulses per revolution (default)
- 360, 512, 1000, **1024** (default), 2048, 2500, 3600, 4096, 5000 via Easy Teach
- Burst function, incremental output of the angular position after switching on the operating voltage
- Max. output frequency: 200 kHz
- 15...30 VDC
- Male M12 x 1; 8-pin
- push-pull A, B, Z

### LED display


- **green steady:** Optimal sensor supply
- **yellow steady:** Positioning element has reached the end of the measuring range. This is indicated by a weaker signal.
- **yellow flashing:** Positioning element is outside the measuring range.
- **off:** Positioning element is in the measuring range.

**Ri 360 P1 - QR24 M1 - INCR X2 - H1 1 8 1**

<b>Ri</b>	<b>360</b>	<b>P1</b>	Operating principle	-	<b>QR24</b>	<b>M1</b>	Housing style	-	<b>INCR</b>	<b>X2</b>	Electrical version	-
			<ul style="list-style-type: none"> <li>Positioning element/shaft diameter</li> <li>P0 without positioning element</li> <li>P1 P1-Ri-QR24/20 mm*</li> <li>P2 P2-Ri-QR24/14 mm*</li> <li>P3 P3-Ri-QR24/12 mm*</li> <li>P4 P4-Ri-QR24/10 mm*</li> <li>P5 P5-Ri-QR24/6 mm*</li> <li>P6 P6-Ri-QR24 / 3/8**</li> <li>P7 P7-Ri-QR24 / 1/4**</li> <li>P8 P8-Ri-QR24 / -</li> </ul>			<ul style="list-style-type: none"> <li>Alu protective unit</li> <li>M0 without aluminium ring</li> <li>M1 with aluminium ring</li> <li>M2 Set M2-QR24 (M1-QR24 + SP1-QR24)</li> <li>M3 Set M3-QR24 (M1-QR24 + SP2-QR24)</li> <li>M4 Set M4-QR24 (M1-QR24 + SP3-QR24)</li> </ul>				<ul style="list-style-type: none"> <li>Number of LEDs</li> <li>X4 2 x LED</li> </ul>		
			<ul style="list-style-type: none"> <li>Measuring range</li> <li>360 360°</li> </ul>			<ul style="list-style-type: none"> <li>Housing style</li> <li>QR24</li> </ul>					<ul style="list-style-type: none"> <li>Incremental output</li> <li>INCR push-pull A, B, Z</li> </ul>	
			<ul style="list-style-type: none"> <li>Operating principle</li> <li>Ri Rotatory inductive</li> </ul>									


\* Positioning element with hollow shaft

<b>H1</b>	<b>1</b>	<b>8</b>	<b>1</b>	Electrical connection
				<ul style="list-style-type: none"> <li>Assignment (digit 5)</li> <li>1 Standard assignment</li> </ul>
				<ul style="list-style-type: none"> <li>Number of contacts (digit 4)</li> <li>8 8-pin M12 x 1</li> </ul>
				<ul style="list-style-type: none"> <li>Connector type (digit 3)</li> <li>1 straight</li> </ul>
				<ul style="list-style-type: none"> <li>Connector type (digit 1 and 2)</li> <li>H1 Male connector M12 x 1</li> </ul>

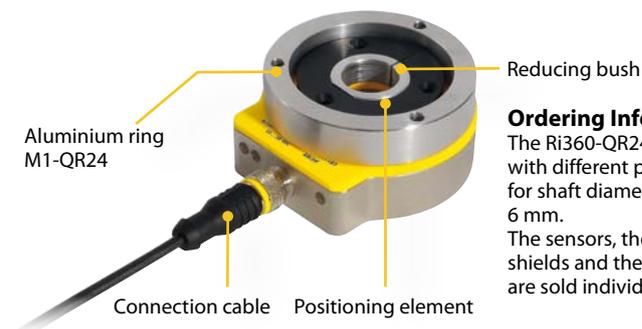


### Ordering Information

The Ri360-QR24 sensors are available with different positioning elements for shaft diameters from 20 mm to 6 mm. The sensors, the aluminium ring, the shields and the positioning elements are sold individually or in a set.

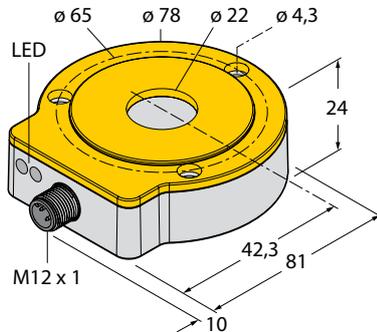

## Wiring diagram

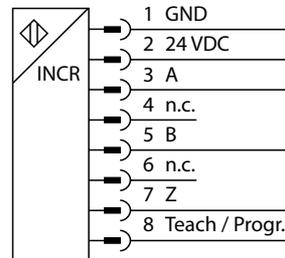

## Measuring range

Measuring range	0...360°
-----------------	----------

## System

Incremental resolution	1024 (default)
Repetition accuracy	0.05 %
Linearity tolerance	≤ 0.05 % v. E.
Temperature drift	≤ ± 0.003 %/K
Ambient temperature	-25...+85 °C

## Electrical data

Operating voltage	15...30 VDC
Ripple	≤ 10 % U <sub>ss</sub>
Rated insulation voltage	≤ 0,5 kV
Reverse polarity protection	yes, full
Output function	8-wire, push-pull
Max. pulse frequency	200 kHz
Signal level high	min. U <sub>is</sub> -2 V
Signal level low	max. 2,0 V
Wire-breakage/reverse polarity	yes/fully
Sampling rate	1000 Hz
Current consumption	< 100 mA

## Housing

Dimensions	81 x 78 x 24 mm
Housing material	Metal/plastic, ZnAlCu1/PBT-GF30-V0
Connection	Male connector, M12 x 1
Vibration resistance	EN60068-2-6, 55 Hz EN 60068-2-27, 40 g
Continuous shock resistance	EN 60068-2-29, 100 g
Protection class	IP67/IP69K
MTTF	138 years to SN 29500 (Ed. 99) 40 °C

## LEDs

Operating voltage indication	LED green
Measuring range indication	LED yellow, yellow flashing

## Others

Included in scope of supply	Mounting aid MT-QR24
-----------------------------	----------------------

expected availability Q4/2013

## Ordering example

<b>Ri</b>	<b>360</b>	<b>P1</b>	-	<b>QR24</b>	<b>M1</b>	-	<b>INCR</b>	<b>X2</b>	-	<b>H1181</b>
Rotary inductive encoder	Measuring range 360°	Positioning element P1-Ri-QR24		Housing style QR24	alu ring M1-QR24		Incremental output: push-pull A, B, Z	2 LEDs		Connection via male connector, M12 x 1, 8-pin

## Accessories for fieldbus connections


The version with the SSI interface is suitable as an encoder for all fieldbus devices

The encoders are often required to be connected directly to the fieldbus that communicates with the higher-level controller. This enables the position feedback signals of the sensor to be transferred directly to the fieldbus system (e.g. to PROFIBUS-DP, DeviceNet™, CANopen or to Ethernet-based protocols) – this consequently eliminates the need for analog input modules.

In order to offer maximum flexibility for connecting sensors, TURCK also provides modular solutions, i.e. linear position sensor, extension cable and fieldbus modules are available as separate components. The TURCK sensors are therefore considerably more compact than the large sensors with integrated fieldbus connection. This eliminates any space problems from the start.

TURCK supplies fieldbus modules as remote I/O systems both in IP20 for the control cabinet (BL20) as well as in IP67 for harsh ambient conditions (BL67). The devices can be programmed with CODESYS (IEC61131) for signal preprocessing or also for stand-alone solutions (for relieving the load on the bus and higher-level controller). If the remote I/O systems are too large, TURCK's exceptionally space saving *piconet*® fieldbus system and *BLcompact* systems offer the optimum solution – with highly rugged modules for direct field installation.

- All standard fieldbus systems
- Very simple changing between fieldbus systems
- Modular principle
- High flexibility
- Sensor independent of fieldbus system
- Exceptionally space saving

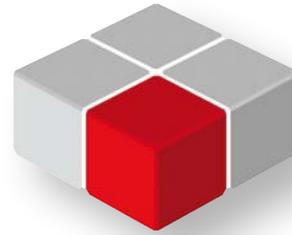

# CODESYS



EtherNet/IP™




CANopen



DeviceNet™



PROFIBUS®

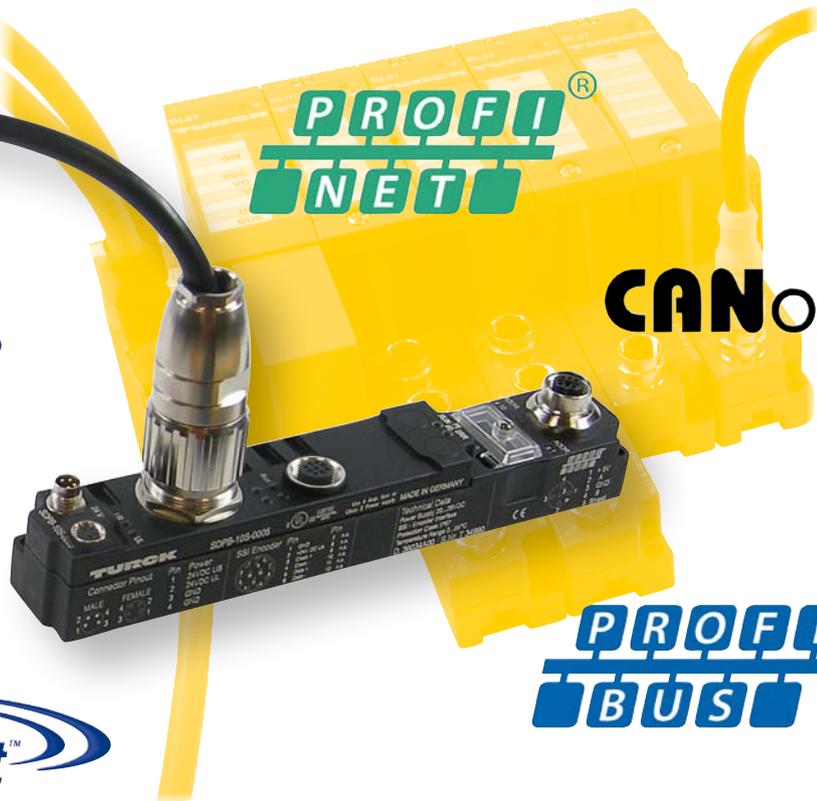



Designation	Description
<b>piconet® – IP67 protection – exceptionally compact</b>	
SDPB-10S-0005	PROFIBUS-DP, M23, 12-pin
SDNB-10S-0005	DeviceNet™, M23, 12-pin
SCOB-10S-0005	CANopen, M23, 12-pin
E-RKS8T-264-1-CSWM12/S3085	M12 extension cable, 8-pin, to M23, 12-pin, 1 m for connecting linear position sensors with SSI output to BL67 and piconet® fieldbus stations
<b>BL compact – IP67 protection – exceptionally rugged</b>	
BLCDP-1M12MT-1SSI	PROFIBUS-DP, M12, 8-pin
BLC DN-1M12S-1SSI	DeviceNet™, M12, 8-pin
E-RKC8T-264-2-RSC8T	M12 connection cable, 8-pin, 2 m connection of linear position sensors with SSI output to BL67 and BL compact fieldbus stations
<b>BL67 – remote I/O system with protection to IP67</b>	
BL67-GW-DPV1	PROFIBUS-DP gateway
BL67-PG-DP	PROFIBUS-DP gateway, programmable
BL67-GW-DN	Gateway DeviceNet™
BL67-GW-CO	Gateway CANopen
BL67-GW-EN	Gateway Ethernet Modbus TCP
BL67-PG-EN	Ethernet Modbus TCP gateway, programmable
BL67-GW-EN-PN	Ethernet PROFINET IO gateway
BL67-1SSI	Communication module
BL67-B-1M12-8	M12 connection module, 8-pin
BL67-B-1M23	M23 connection module, 12-pin
E-RKC8T-264-2-RSC8T	M12 connection cable, 8-pin, 2 m connection of linear position sensors with SSI output to BL67 and BL compact fieldbus stations
E-RKS8T-264-1-CSWM12/S3085	M12 extension cable, 8-pin, to M23, 12-pin, 1 m for connecting linear position sensors with SSI output to BL67 and piconet® fieldbus stations
<b>BL20 – remote I/O system with protection to IP20</b>	
BL20-GW-DPV1	PROFIBUS-DP gateway
BL20-GWBR-DNET	DeviceNet™ gateway
BL20-GWBR-CANOPEN	CANopen gateway
BL20-GW-EN	Ethernet Modbus TCP gateway
BL20-PG-EN	Ethernet Modbus TCP gateway, programmable
BL20-GW-PG-EN	Ethernet PROFINET IO gateway
BL20-1SSI	Communication module
BL20-S4T-SBBS	Connection module, tension spring connection
E-RKC8T-264-2	M12 extension cable, 8-pin, 2 m open cable end for connecting linear position sensors with SSI output to BL20 fieldbus stations

### BL20 example configuration

The following components are required to connect an encoder sensor to a PROFIBUS system via a BL20 station:

1 x PROFIBUS gateway	1 x communication module	1 x connection module	1 x connection cable
BL20-GW-DPV1	BL20-1SSI	BL20-S4T-SBBS	E-RKC-8T-264-2

### piconet® example configuration

The following components are required to connect an encoder sensor to a PROFIBUS system via a piconet® station:

1 x PROFIBUS compact station	1 x connection cable
SDPB-10S-0005	E-RKS-8T-264-1-CSWM12/S3085

# Connection and function accessories





## Connection accessories

Adapter cable	
Type	Description
RKC5.301T-1,5-RSC4T/TX320	Adapter cable for connecting the Modbus RTU sensor to the parameter unit USB-2-IOL-0002, PUR
Connection cable for series with analog output	
Type	Description
RKS4,5T-2/TXL	Connection cable M12, 5-pin, shielded, 2 m with open end, PUR
Connection cable for series with SSI interface	
Type	Description
E-RKC8T-264-2-RSC8T	M12 extension cable, 8-pin, 2 m connection of encoders with SSI output to BL67 and <i>BL compact</i> fieldbus stations
E-RKC8T-264-2	M12 extension cable, 8-pin, 2 m open cable end for connecting encoders with SSI output to BL20 fieldbus stations
E-RKS8T-264-1-CSWM12/S3085	M12 extension cable, 8-pin, to M23, 12-pin, 1 m for connecting encoders with SSI output to BL67 and <i>piconet</i> ® fieldbus stations



No matter the shaft diameter, we ensure maximum flexibility with our extensive range of accessories. Here you find the right mounting aid:

## Function accessories

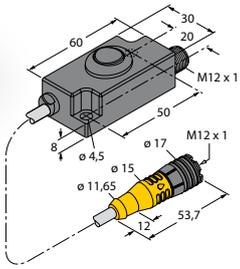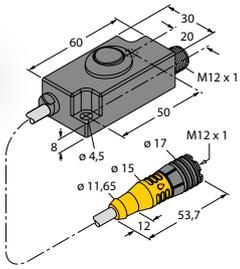Dimension drawing	Type	Description
 	TB4	Analog test box; Test box for sensors with analog or switch output; incl. batteries
 	TX1-Q20L60	Teach adapter for programming the measuring range of inductive encoders with a 5-pin male
 	TX2-Q20L60	Teach adapter for programming the measuring range of inductive encoders with an 8-pin male
 	USB-2-IOL-0002	IO-Link master with integrated USB interface for parametrizing the IO-Link-capable encoders via a PC









# Accessories

Ready-to-install positioning elements/  
Positioning elements and reducing bushes

**TURCK**









Industrial  
Automation

## Ready-to-install positioning elements

Dimension drawing	Type	Description	Dimension drawing	Type	Description
	P1-Ri-QR24	Positioning element with 20 mm reducing bush		P5-Ri-QR24	Positioning element with 6 mm reducing bush
	P2-Ri-QR24	Positioning element with 14 mm reducing bush		P6-Ri-QR24	Positioning element with 3/8" reducing bush
	P3-Ri-QR24	Positioning element with 12 mm reducing bush		P7-Ri-QR24	Positioning element with 1/4" reducing bush
	P4-Ri-QR24	Positioning element with 10 mm reducing bush		P8-Ri-QR24	Positioning element with blanking plug

Extensive range of mounting accessories for easy adaptation to many different shaft diameters.

## Positioning element and reducing bushes

Dimension drawing	Type	Description	Dimension drawing	Type	Description
	PE1-QR24	Positioning element Base unit		RA3-QR24	Reducing bush 12 mm
	RA0-QR24	Blanking plug		RA4-QR24	Reducing bush 10 mm
	RA1-QR24	Reducing bush 20 mm		RA5-QR24	Reducing bush 6 mm
	RA2-QR24	Reducing bush 14 mm		RA6-QR24	Reducing bush 3/8"
				RA7-QR24	Reducing bush 1/4"

The positioning element and the different reducing bushes can of course be ordered separately. The modular principle simplifies storage and provides more flexibility for installation.

# Accessories

## Shields/Standard mounting accessories

The accessories/MT-QR24 enclosed in the delivery help to mount encoder and positioning element at an optimal distance from each other. In addition, LEDs indicate the switching status. The shields

listed in the chapter "Accessories" can optionally be used to increase the allowed distance between positioning element and sensor.

### Shield


Dimension drawing	Type	Description
	SP1-QR24	Shield Ø 74 mm, aluminium
	SP2-QR24	Shield Ø 74 mm with bore for shaft guidance, aluminium

Dimension drawing	Type	Description
	SP3-QR24	Shield Ø 52 mm, aluminium

### Standard accessories

Dimension drawing	Type	Description
	M1-QR24	Aluminium ring
	M2-QR24	M1-QR24+SP1-QR24
	M3-QR24	M1-QR24+SP2-QR24
	M4-QR24	M1-QR24+SP3-QR24

Dimension drawing	Type	Description
	MT-QR24	Mounting aid, included in the delivery scope of the encoder

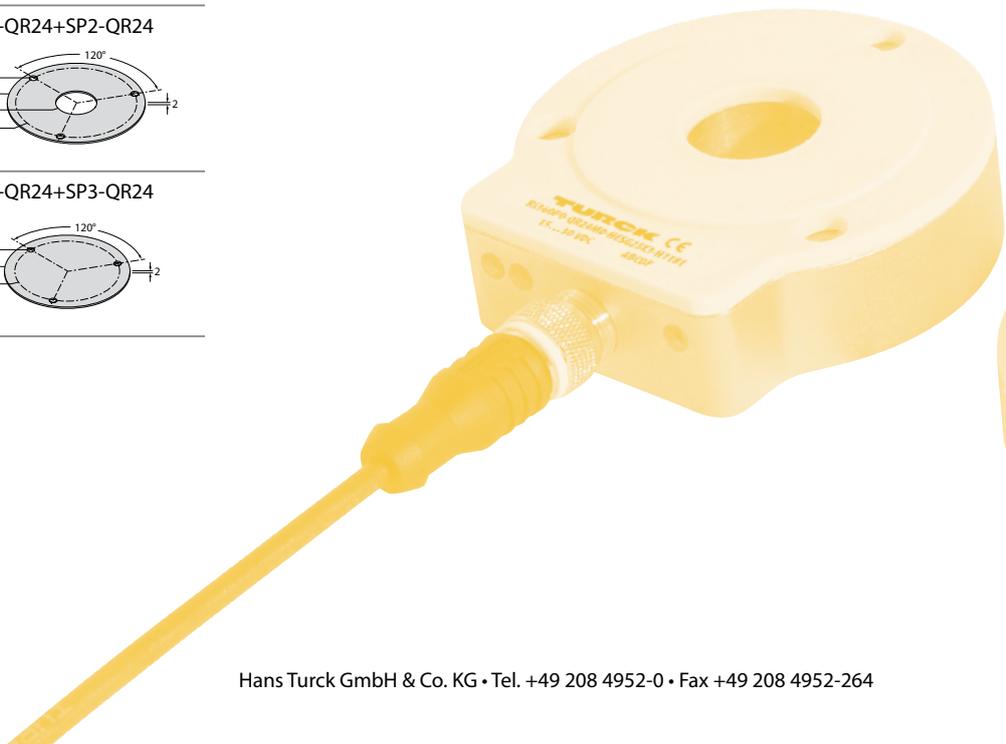

# Mounting options

The figure below shows the two separate units, sensor and positioning element.

You can easily adapt the sensor to many different shaft diameters with the extensive range of mounting accessories. Based on the functional principle of RLC coupling, the sensor operates absolutely

wear-free and is immune to magnetized metal splinters and other interference fields. Wrong installation is hardly possible.

The separately arranged sensor and positioning element inhibit that compensating currents or damaging mechanical

loads are transmitted via the shaft to the sensor. In addition, the encoder remains tight and highly protected during its entire lifespan.

### Mounting option A:





First, interconnect the positioning element and the rotatable shaft. Then place the encoder above the rotating part in such a way that you get a tight and protected unit.

### Mounting option B:

Push the encoder on the back side of the shaft and fasten it to the machine. Then clamp the positioning element to the shaft with the bracket.

### Mounting option C:

If the positioning element is to be screwed on a rotating machine part and not on a shaft, first insert the RA8-QR24 blanking plug, then tie up the bracket and then screw on the encoder via the three bores.

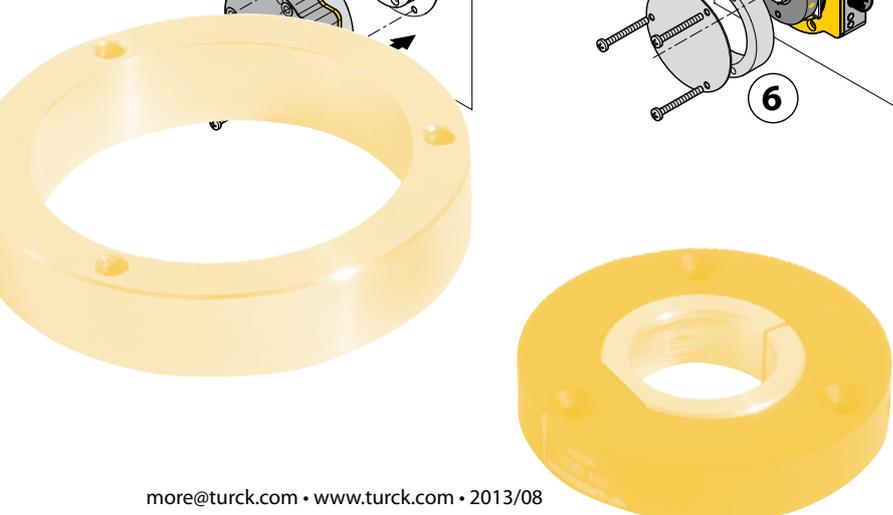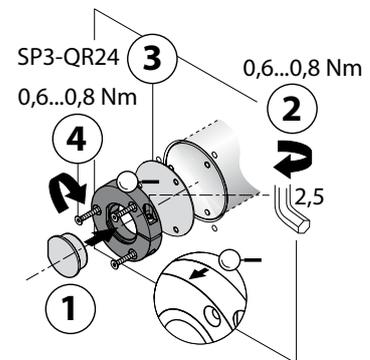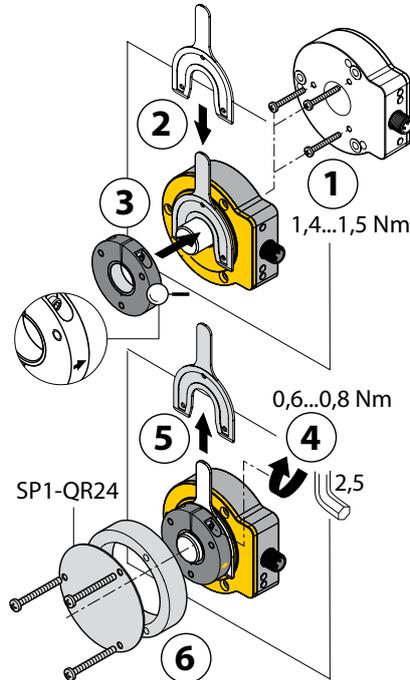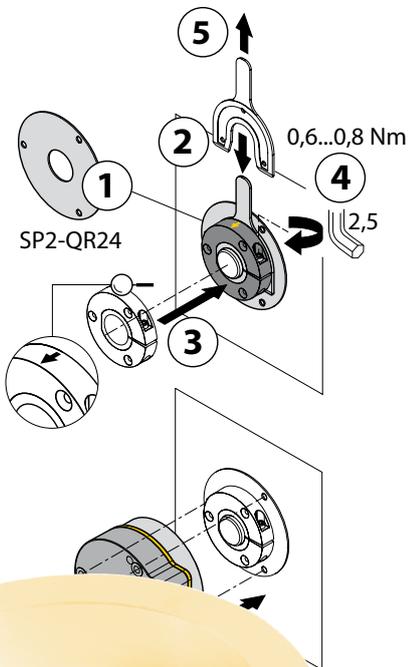

**TURCK**

**Industrial  
Automation**



**www.turck.com**

**Your Global  
Automation Partner!**

**WORLDWIDE HEADQUARTERS**

Hans Turck GmbH & Co. KG  
Witzlebenstr. 7  
45472 Muelheim an der Ruhr  
Germany  
Tel. +49 208 4952-0  
Fax +49 208 4952-264  
E-Mail [more@turck.com](mailto:more@turck.com)  
Internet [www.turck.com](http://www.turck.com)

D101999 2013/08

